


# LT56 Laser Tool

## Included Accessory



HR220 Optional

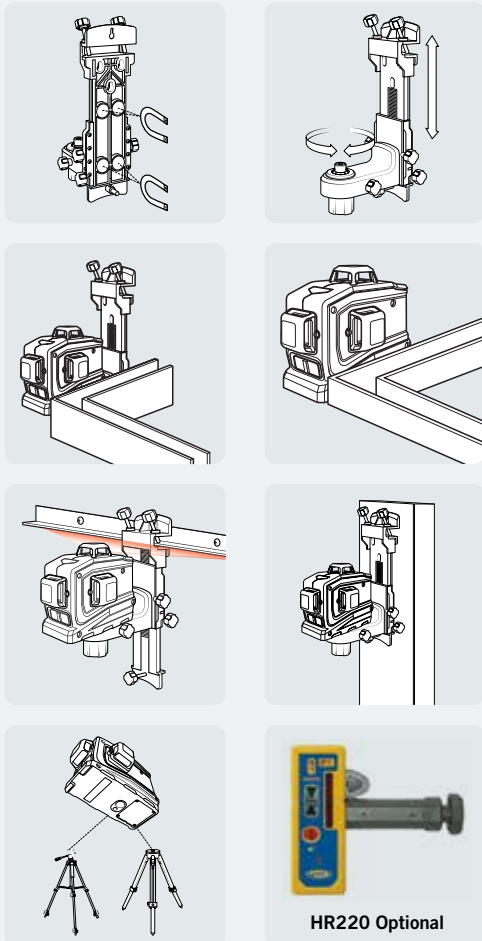


LT56 Package



LT56-2 Package  
with HR220 Receiver

## Specifications

Laser Power	Less than 1mw
Class/Wavelength	Class 2 / 635nm
Batteries	Lithium-ion, 7200 mAh, 3.7 V
Battery Life	1 beam - 45 hours 2 beam - 35 hours 3 beam - 25 hours
Charge Time	12 hours (30 minute quick charge will provide 2 hours operation with 2 beams)
Battery Warranty	2 years
Charger	Input: 100-240V AC 190 mA Output: 5V DC 800mA
Out of Level Indication	Flashing beam - triple flash every 10 seconds
Self Leveling Range	4° ±1° all direction
Dust and Water Resistance	IP54
Operating Temperature	-10° to 45° (14 °F to 113 °F)
Storage Temperature	-20° to 60° (-4 °F to 140 °F)
Size (L x W x H)	152 x 116 x 84 mm (4.6 x 6.0 x 3.3 in)
Weight	0.67 kg (1.48 lb)

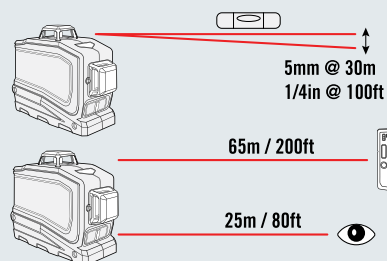


## Contact Information:

**NORTH AMERICA**  
Trimble Spectra Precision Division  
5475 Kellenburger Road  
Dayton, Ohio 45424 U.S.A.  
Toll Free +1-888-272-2433  
Fax +1-937-245-5489  
[www.spectralasers.com](http://www.spectralasers.com)

**EUROPE**  
Trimble Kaiserslautern GmbH  
Am Sportplatz 5  
67661 Kaiserslautern  
GERMANY  
Phone +49-6301-711414  
Fax +49-6301-32213

© 2013, Trimble Navigation Limited. All rights reserved. Trimble, the Globe & Triangle logo and Spectra Precision are trademarks of Trimble Navigation Limited, registered in the United States Patent and Trademark office and in other countries. All other trademarks are the property of their respective owners.  
PN 022507-354 (11/13)

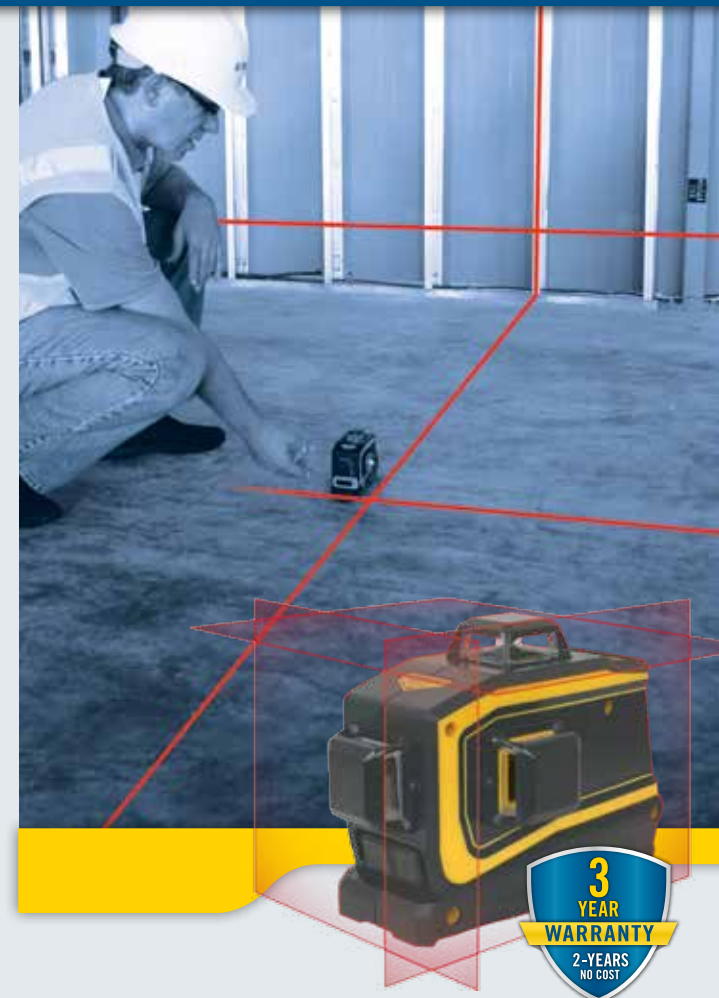

## Rugged Universal Laser Layout Tool




# LT56 Laser Tool

## Rugged Universal Laser Layout Tool

The LT56 provides three 360 degree planes of laser light. A horizontal plane and 2 vertical planes 90 degrees apart provide all the reference required for interior layout.

- Bright crisp laser lines - extends the working range and are easy to see
- Lithium-Ion batteries provide 25 hour operating time - huge savings on battery cost compared to alkaline models and are ecological friendly
- Rugged and durable - 3 foot (1m) drop specification means the LT56 can keep working even after minor accidents
- Versatile mounting accessory - includes ceiling track, magnetic and tripod mounts with rotation and fine vertical adjustment
- The HR220 Line Receiver can be added for short range exterior layout and elevation control

### Applications

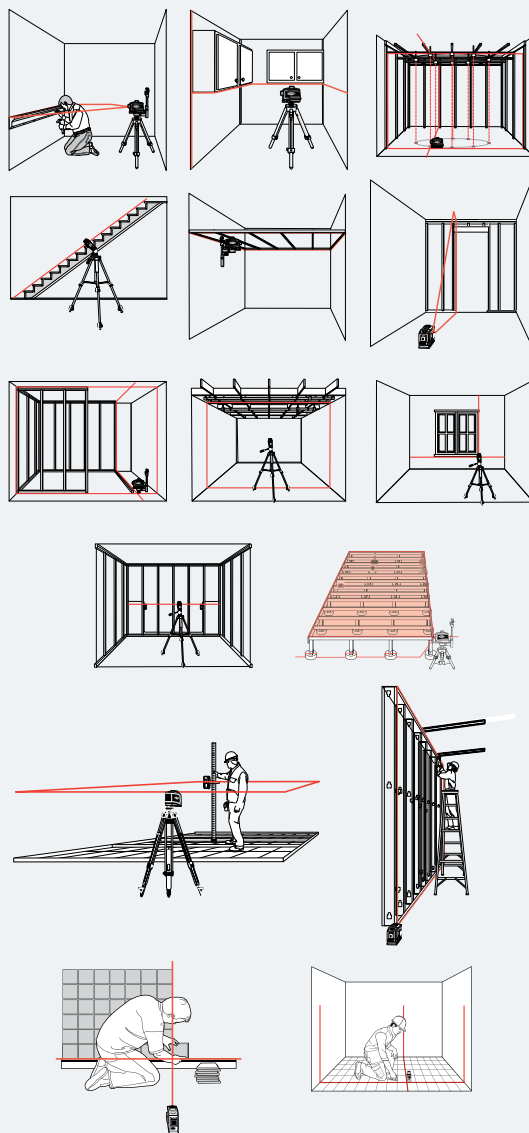

# One Tool Does It All

## LT56